


# B SERIES

## 3.7x6.1 SMT Type Tact Switch

TACT SWITCH



### HOW TO ORDER

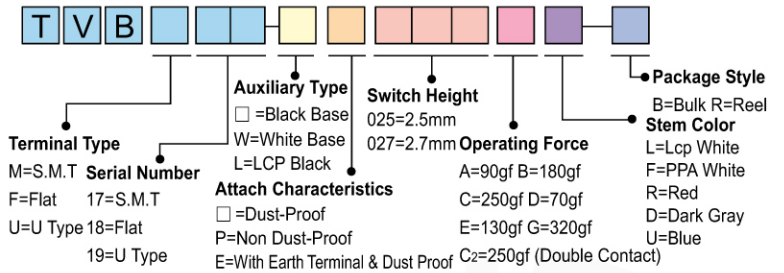

### ◆ FEATURES

- Low profile of 2.5mm height
- Compact size 3.7x6mm for high density mounting
- Vertical Push type
- Anti-ESD ground terminal available

### ◆ APPLICATIONS

- Visual
- Audio
- Pro audio

### ◆ SPECIFICATION

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	A:B:D:E=100,000Cycles C:G:50,000Cycles
Mechanical performance	Operating force	A:90gf B:180gf C:250gf D:70gf E:130gf G:320gf
	Travel	0.25 ± 0.1mm

### ◆ DIAGRAM

No.	Dimensions	Circuit Diagram				
		PCB Layout				
1		<table border="1"> <tr><td>H</td></tr> <tr><td>2.5</td></tr> <tr><td>2.7</td></tr> </table>	H	2.5	2.7	
H						
2.5						
2.7						
2		<table border="1"> <tr><td>H</td></tr> <tr><td>2.5</td></tr> <tr><td>2.7</td></tr> </table>	H	2.5	2.7	
H						
2.5						
2.7						
3		<table border="1"> <tr><td>H</td></tr> <tr><td>2.5</td></tr> <tr><td>2.7</td></tr> </table>	H	2.5	2.7	
H						
2.5						
2.7						