


B SERIES

6.1x3.5 Through Hole & SMT Type Tact Switch

TACT SWITCH



HOW TO ORDER

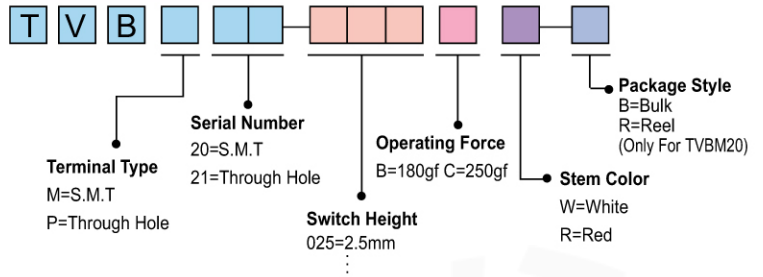

◆ FEATURES

- 6.1x3.5mm for high density mounting
- Snap-in type
- Vertical push type

◆ APPLICATIONS

- Visual
- Audio
- Pro audio

◆ SPECIFICATION

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B=100,000Cycles C=50,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	<p>● TVBM20</p>	
2	<p>● TVBP21</p>	